

SJ36/40/50CX-P2

Multi-MPPT String Inverter for 1000 Vdc System



HIGH YIELD

- DC 15A current input, compatible with over 500W+ PV module
- Dynamic shading optimization mode
- Built-in PID recovery function

SMART O&M

- Key component diagnosis and protection
- Smart IV Curve Diagnosis
- Grid fault record function, easy for remote O&M


LOWER INVESTMENT

- Easy to handle thanks to 34% weight reduced
- Plug and Play with Buckle Design


PROVEN SAFETY

- IP66 protection and C5 Anti-corrosion
- DC Type I+II SPD, AC Type II SPD
- Support AFCI 2.0 function

CIRCUIT DIAGRAM

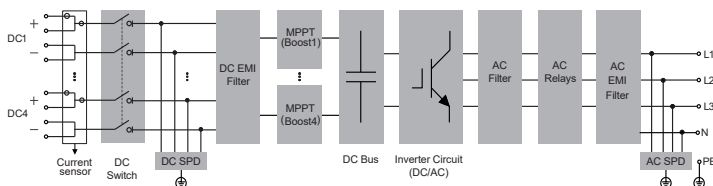

EFFICIENCY CURVE (SG50CX-P2)

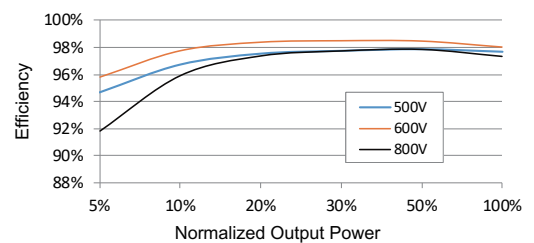

Type designation	SJ36CX-P2	SJ40CX-P2	SJ50CX-P2
Input (DC)			
Recommended max. PV input power	50.4 kWp	56 kWp	70 kWp
Max. PV input voltage	1100 V		
Min. PV input voltage / Startup input voltage	160 V / 200 V		
Rated PV input voltage	600 V		
MPP voltage range	160 V - 1000 V		
No. of independent MPP inputs	4		
No. of PV strings per MPPT	2		
Max. PV input current	120 A (30 A * 4)		
Max. DC short-circuit current	160 A (40 A * 4)		
Max. current for DC connector	30 A		
Output (AC)			
Rated AC output power	36 kW (415 V @50°C) *	40 kW (415 V @50°C) *	50 kW (415 V @50°C) *
Max. AC output apparent power	40 kVA (415 V @40°C) *	44 kVA (415 V @40°C) *	55 kVA (415 V @40°C) *
Max. AC output current	60.2 A	66.9 A	83.6 A
Rated AC output current(at 230V)	52.17 A	58 A	72.5 A
Rated AC voltage	3 / N / PE, 220 V / 380 V, 230 V / 400 V		
AC voltage range	312 V - 480 V		
Rated grid frequency	50 Hz / 60 Hz		
Grid frequency range	45 Hz – 55 Hz / 55 Hz – 65 Hz		
Harmonic (THD)	< 3 % (at rated power)		
Power factor at rated power / Adjustable power factor	> 0.99 / 0.8 leading – 0.8 lagging		
Feed-in phases / AC connection	3 / 3-N-PE		
Efficiency			
Max. efficiency / European efficiency	98.5% / 98.3%		
Protection			
Grid monitoring	Yes		
DC reverse polarity protection	Yes		
AC short-circuit protection	Yes		
Leakage current protection	Yes		
Surge protection	DC Type I+II / AC Type II		
Ground fault monitoring	Yes		
DC switch	Yes		
PV String current monitoring	Yes		
Arc fault circuit interrupter (AFCI)	Yes		
PID recovery function	Yes		
Optimizer compatibility *	Optional		
General Data			
Dimensions (W*H*D)	645 mm * 575 mm * 245 mm		
Weight	40 kg		41 kg
Mounting Method	Wall-mounting bracket		
Topology	Transformerless		
Degree of protection	IP66		
Night power consumption	< 5 W		
Corrosion	C5		
Operating ambient temperature range	-30 °C - 60 °C		
Allowable relative humidity range (non-condensing)	0 % - 100 %		
Cooling method	Smart forced air cooling		
Max. operating altitude	4000 m		
Display	LED, Bluetooth+APP		
Communication	RS485 / Optional: WLAN, Ethernet		
DC connection type	Evo2 (Max. 6 mm ²)		
AC connection type	OT terminal (16 - 35 mm ²)		OT or DT terminal (35 - 50 mm ²)
AC Cable specification	Outside diameter 18 mm - 38 mm		
Grid Compliance	IEC 62109, IEC 61727, IEC 62116, VDE-AR-N 4105:2018, IEC 61000-6-3, EN 50549-1, CEI 0-21 2019, CEI0-16 2019, VDE 0126-1-1/A1 VFR 2019, UTE C15-712-1:2013, UNE 206007-1/RD 1699, UNE 217002, G99IEC 63027		
Grid Support	Q at night function, LVRT, HVRT, active & reactive power control and power ramp rate control		

* PV input voltage need over 630VDC

** For optimizer compatibility, please consult Sungrow before placing an order